

Voltage Controlled Clock Oscillator (压控振荡器) - KV14S



Feature 特征

Frequency pulling range $\pm 80\text{ppm}$ typical 压控范围正常为 $\pm 80\text{ppm}$

Applications 应用

Frequency electrical calibration, high-frequency network application system, military anti-interference communication 频率电校准, 高频网络应用系统, 军事防干扰通讯


General Specifications 规格参考

PARAMETER	性能参数	KV14S	
Frequency Range	频率范围	10.0~250.0MHz	10.0~156.0MHz
Supply Voltage	供给电压	+3.3V($\pm 5\%$)	+5.0V($\pm 10\%$)
Center Control Voltage	中心控制电压	1.65Vdc((0.3V~3.0V)	2.5Vdc (0.5V~4.5V)
Output Logic	输出波形	True Sine	
Output Load	输出负载	50 Ω	
Harmonics	谐波抑制	< -30dBc (Frequency dependent)	
Frequency Tolerance	调整频差	$\pm 20\text{ppm}$	
Current Consumption	工作电流	20mA max.	40mA max
Output Level	输出级别	+3dBm min.	+5dBm min.
Frequency Pulling Range	压控范围	$\pm 80\text{ppm}$ min.	
Phase Noise (e.g.125.0MHz)	相位噪声	-75dBc/Hz@10Hz; -128dBc/Hz@100KHz	
Input Impedance	输入电阻	> 10K Ω	
Start-up Time	起振时间	2ms typ.; 6ms max.	
Linearity	非线性误差	$\pm 10\%$ max.	
Modulation Bandwidth (-3dB)	调制宽带	10KHz min.	
Aging Per Year	老化率	$\pm 3\text{ppm} \sim \pm 5\text{ppm}/\text{year}$	
Storage Temperature Range	储存温度范围	-55 $^{\circ}\text{C} \sim +125^{\circ}\text{C}$	

Frequency Stability 温度频差 VS Operating Temperature Range 温度范围						
Temp. Code	Temp.\ppm	± 10	± 20	± 30	± 50	± 100
B	-20~70 $^{\circ}\text{C}$	o	o	o	o	o
C	-40~85 $^{\circ}\text{C}$		o	o	o	o
D	-55~85 $^{\circ}\text{C}$			o	o	o
E	-55~105 $^{\circ}\text{C}$				o	o
F	-55~125 $^{\circ}\text{C}$				o	o

NOTE: Please consult for other specifications 若有其它规格需求请告知


Outline Dimensions (Unit: mm) 外形尺寸

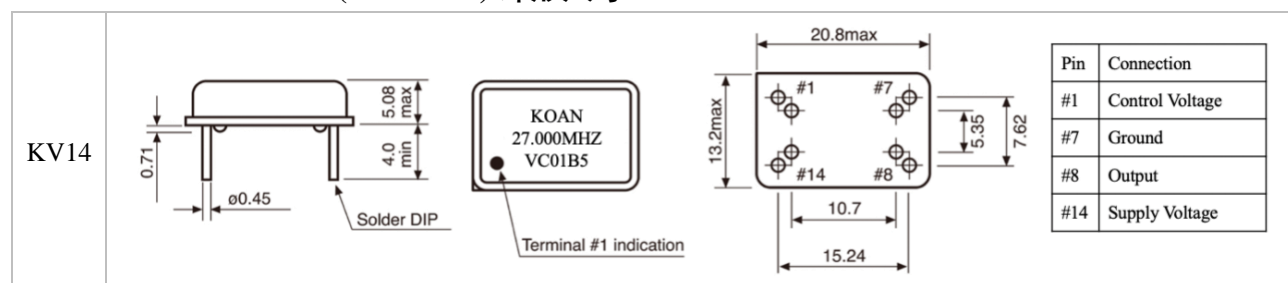

Part Number Guide 产品编号

<u>KV</u> ↓	<u>14</u> ↓	<u>S</u> ↓	-	<u>27.000</u> ↓	-	<u>80</u> ↓	-	<u>33</u> ↓	-	<u>C</u> ↓	-	<u>30</u> ↓	-	<u>NS</u> ↓
系列	封装	输出波形	-	标称频率	-	压控范围	-	工作电压	-	工作温度	-	温度频差	-	特殊要求
KV=VCXO 压控振荡器	封装尺寸 DIP14 DIP08	S = Sine Wave		(In MHz)		80=±80ppm		33=3.3V 50=5.0V		B: -20~+70°C C: -40~+85°C D: -55~+85°C E: -55~+105°C F: -55~+125°C		10 = ±10ppm 20 = ±20ppm 30 = ±30ppm 50 = ±50ppm 100 = ±100ppm		'NS':特 殊要求

Wave Solder Profile 波峰焊

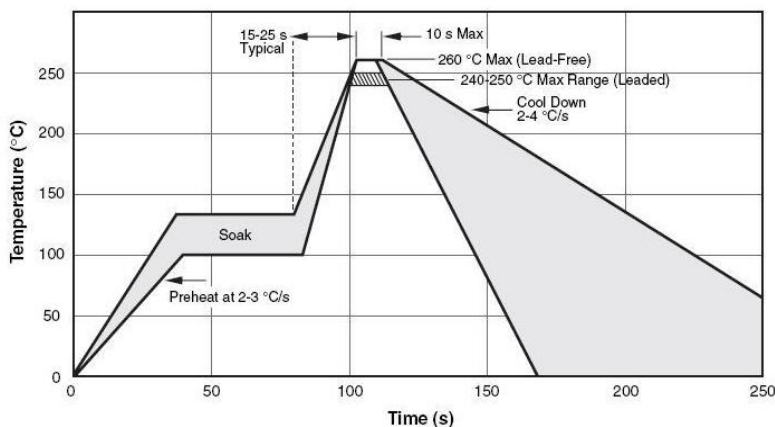

Average Ramp-up Rate	升温速度	~200°C/Second
Heating Rate during preheat	预热速度	1~2°C/second typical; 4°C/second max
Final Preheat Temperature Ts	最终预热温度	~130°C
Peak Temperature Tp	最高温度	260°C
Time within +0°C/-5°C of actual temperature tp	实际温度时间	10 seconds
Ramp-Down Rate	降温速度	5°C/second max

Revision 版本

版本 Rev.	修改页 Revise Page	修改内容 Revise Contents	日期 Date	修改人 Reviser
1.0	NA	-	2021.02.25	JH